



Groundwater Statistical Evaluation Plan

Belle River Power Plant Coal Combustion Residual Bottom
Ash Basins

4505 King Road
China Township, Michigan

October 2017




Groundwater Statistical Evaluation Plan

Belle River Power Plant Coal Combustion Residual Bottom Ash Basins


*4505 King Road
China Township, Michigan*

October 2017

*Prepared For
DTE Electric Company*



Graham Crockford, C.P.G.
Senior Project Geologist



David B. McKenzie, P.E.
Senior Project Engineer

TRC Engineers Michigan, Inc. | DTE Electric Company
Final
X:\WPAAM\PJT2\265996\STATS CERTS\03 BRPP\R265996-BRPP BABS.DOCX

Table of Contents

Section 1 Introduction	1-1
1.1 Regulatory Framework	1-1
1.2 Site Hydrogeology	1-1
Section 2 Groundwater Monitoring System.....	2-1
2.1 Groundwater Monitoring System.....	2-1
2.2 Constituents for Detection Monitoring	2-1
2.3 Constituents for Assessment Monitoring	2-1
Section 3 Statistical Analysis	3-1
3.1 Establishing Background	3-1
3.2 Data Evaluation and Data Distributions.....	3-2
3.2.1 Background Determination	3-3
3.2.2 Outlier Evaluation.....	3-3
3.2.3 Testing for Normality	3-3
3.2.4 Evaluation of Non-Detects.....	3-4
3.3 Parametric Tolerance or Prediction Limits.....	3-4
3.4 Non-Parametric Tolerance or Prediction Limits.....	3-5
3.5 Double Quantification Rule	3-5
3.6 Verification Resampling.....	3-5
Section 4 Evaluation of Detection Monitoring Data.....	4-1
4.1 Statistical Evaluation during Detection Monitoring	4-1
Section 5 Assessment Monitoring.....	5-1
Section 6 Certification.....	6-1
Section 7 References.....	7-1

List of Figures

Figure 1 Monitoring Network and Site Plan

Section 1

Introduction

1.1 Regulatory Framework

The United States Environmental Protection Agency (U.S. EPA) published the final rule for the regulation and management of Coal Combustion Residuals (CCR) under the Resource Conservation and Recovery Act (RCRA) (the CCR Rule) on April 17, 2015. The CCR Rule, which became effective on October 19, 2015, applies to the Belle River Power Plant (BRPP) CCR Bottom Ash Basins (BABs). Pursuant to the CCR Rule, no later than October 17, 2017, the owner or operator of a CCR unit must develop the groundwater sampling and analysis program to include selection and certification of the statistical procedures to be used for evaluating groundwater in accordance with Title 40 Code of Federal Regulations (CFR) §257.93. This certification must include a narrative description of the statistical method that will be used for evaluating groundwater monitoring data.

TRC Engineers Michigan, Inc., the engineering entity of TRC Environmental Corporation (TRC), prepared this Groundwater Statistical Evaluation Plan (Statistical Plan) for the BRPP BABs CCR unit on behalf of DTE Electric Company (DTE Electric). This Statistical Plan was prepared in accordance with the requirements of §257.93 and describes how data collected from the groundwater monitoring system will be evaluated. As part of the evaluation, the data collected during detection monitoring events (post October 17, 2017), are evaluated to identify statistically significant increases (SSIs) in detection monitoring parameters (Appendix III of the CCR Rule) to determine if concentrations in detection monitoring well samples exceed background levels.

The CCR Rule is not prescriptive with regards to the actual means and methods to be used for statistically evaluating groundwater data, and there is flexibility in the method selection, as long as specific performance metrics are met. A description of statistical methods that meet the performance objectives of the CCR Rule are described in U.S. EPA's *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, Unified Guidance* (*Unified Guidance*, USEPA, 2009).

1.2 Site Hydrogeology

The BRPP BABs CCR unit is located approximately one-mile west of the St. Clair River. The BRPP BABs CCR unit is underlain by more than 130 feet of unconsolidated sediments, with the lower confining Bedford Shale generally encountered from 135 to 145 feet-below ground surface (feet-bgs). In general, the BRPP BABs CCR unit is initially underlain by at least 90 to as much as 136 feet of laterally extensive low hydraulic conductivity silty clay-rich deposits. The depth to

the top of the confined sand-rich uppermost aquifer encountered immediately beneath the silty clay-rich deposits varies up to 46 feet within the monitoring well network and rapidly thins to the south and east of the BABs and pinches out (e.g., no longer present) to the southeast in the vicinity of SB-16-01 (Figure 1). Consequently, the uppermost aquifer is not laterally contiguous across the entire BRPP BABs CCR unit, and not present in the southeastern corner of the BABs.

The variability in the depth to the uppermost aquifer is a consequence of the heterogeneity of the glacial deposits and is driven by the lateral discontinuity of the sand outwash within the encapsulating fine-grained, silty clay till that confines the uppermost aquifer. There is an apparent lack of interconnection and/or significant vertical variation between the uppermost aquifer sand unit(s) encountered across the BRPP BABs CCR unit as demonstrated by the extensive amount of time (months) it took for water levels in monitoring well MW-16-02 to reach equilibrium after well construction and development (TRC, 2017).

Given the horizontally expansive clay with substantial vertical thickness that isolates the uppermost aquifer from the BRPP BABs CCR unit, the heterogeneity of the glacial deposits (with the top of the uppermost aquifer elevation across the BABs, where present varying up to 46 feet vertically), the no-flow boundary where no sand or gravel is present in the southeastern portion of the BABs CCR unit area, and the apparent lack of hydraulic interconnectedness of the uppermost aquifer encountered at the BABs in some areas, it is not appropriate to infer horizontal flow direction or gradients across the BRPP BABs CCR unit.

In addition, the elevation of CCR-affected water maintained within the BRPP BABs is approximately 5 feet above the potentiometric surface elevations in the uppermost aquifer at the BABs CCR unit area. This suggests that if the CCR affected surface water in the BABs were able to penetrate the silty clay-rich underlying confining unit that the head on that release likely would travel radially away from the BABs within the uppermost aquifer. However, with the very thick continuous silty clay-rich confining unit beneath the BRPP it is not possible for the uppermost aquifer to have been affected by CCR from BRPP operations that began in the 1980s.

Due to the relatively small footprint of the BABs, the low vertical and horizontal groundwater flow velocity, the potential for radial flow, and the fact that the saturated unit being monitored is isolated by a laterally contiguous silty-clay unit, which significantly impedes vertical groundwater flow thus preventing the monitored saturated zone from potentially being affected by CCR, monitoring of the BRPP BABs CCR unit using intra-well statistical methods is appropriate. In addition, because the uppermost aquifer is not uniformly present across the BABs CCR unit, there are no clear upgradient wells. As such, intra-well statistical approaches will be used during detection monitoring.

Section 2

Groundwater Monitoring System

2.1 Groundwater Monitoring System

A groundwater monitoring system has been established for BRPP BABs CCR unit (TRC, October 2017), which established the following locations for detection monitoring. The locations are shown on Figure 1.

MW-16-01	MW-16-02	MW-16-03
MW-16-04	MW-16-09	

2.2 Constituents for Detection Monitoring

Subsection 257.94 describes the requirement for detection monitoring for Appendix III parameters. Detection monitoring will be performed semiannually unless an alternative frequency is made on a site-specific basis. The detection monitoring parameters are identified in Appendix III of §257.94 and consist of the following:

Boron	Calcium	Chloride
Fluoride	pH	Sulfate
Total Dissolved Solids (TDS)		

2.3 Constituents for Assessment Monitoring

Assessment monitoring per §257.95 is required when a SSI over background has been detected for one or more of the constituents identified in Appendix III to Part 257 – Constituents for Detection Monitoring. In the event that assessment monitoring is triggered through the statistical evaluation of detection monitoring parameters, the following assessment monitoring parameters will be sampled:

Antimony	Arsenic	Barium
Beryllium	Cadmium	Chromium
Cobalt	Fluoride	Lead
Lithium	Mercury	Molybdenum
Selenium	Thallium	Radium 226 and 228 (combined)

Section 3

Statistical Analysis

Groundwater sampling and analytical requirements are described in §257.93. The owner or operator of the CCR unit must select a statistical method specified in §257.93(f) to be used in evaluating groundwater monitoring data. The test shall meet the performance standards outlined in §257.93(g). The goal of the statistical evaluation plan is to provide a means to formulate an opinion or judgement as to whether the CCR unit has released contaminants into groundwater. This plan describes the statistical procedures to be used to determine if a statistical significant increase (SSI) or in the case of pH, a statistically significant difference (SSD), indicating that data is from a different population than background. This plan was developed using applicable guidance, including the *Unified Guidance*. In addition to using applicable guidance documents, commercially available statistical evaluation tools will be utilized by BRPP BABs CCR unit to develop statistically derived limits so that detection monitoring results can be compared to background.

The CCR Rule allows a variety of methods for conducting statistical evaluations. The specific procedure for a given data set depends on several factors including the proportion of the data set with detected values and the distribution of the data. These will not be known until the data are collected. It is generally anticipated, however, that the tolerance or prediction interval procedure will be the preferred method of conducting detection monitoring data evaluation to the extent that the data support the use of that method. This statistical procedure is described below in this section of the plan and in detail in the *Unified Guidance*.

3.1 Establishing Background

Background groundwater quality shall be established prior to October 17, 2017. Per §257.93(d), the owner or operator of the CCR unit must establish background groundwater quality in hydraulically upgradient or background well(s). The development of a groundwater statistical evaluation program for detection monitoring involves the proper collection of background samples, regardless of whether an inter-well or intra-well monitoring strategy is implemented. Background may be established at wells that are not located hydraulically upgradient from the unit if it meets the requirement of §257.91(a)(1). A determination of background quality may include sampling of wells that are not hydraulically upgradient of the CCR management area where:

1. Hydrogeologic conditions do not allow the owner or operator of the CCR unit to determine what wells are hydraulically upgradient; or
2. Sampling at other wells will provide an indication of background groundwater quality that is as representative as or more representative than that provided by the upgradient wells.

The purpose of obtaining adequate background groundwater data is to approximate, as accurately as possible, the true range of ambient concentrations of targeted constituents. Background groundwater data should eliminate, to the extent possible, statistically significant concentration increases not attributable to the CCR unit. Specifically, the owner or operator of a CCR unit must install a groundwater monitoring system that consists of a sufficient number of wells, installed at appropriate locations and depths, to yield groundwater samples from the uppermost aquifer that accurately represent the quality of background groundwater that has not been affected by leakage from a CCR unit. The sampling frequency should be selected so that the samples are physically independent. These background groundwater parameters can be adequately qualified by doing the following:

- Collecting the minimum number of samples that satisfy the requirements of the statistical methods that are used (i.e., that result in adequate statistical power);
- Incorporating seasonal and/or temporal variability into the background data set; and

Incorporating the spatial component of variability into the background data set (i.e., the variability that comes with obtaining samples from different locations within the same groundwater zone).

The initial background/baseline sampling period is a minimum of eight events for Existing CCR units that were in operation on October 19, 2015. This provides a minimal background data set to initiate statistical comparisons. Over time, the short baseline period may result in a high risk of false positive statistical results. The facility may periodically update background data to account for variability in background conditions. The *Unified Guidance* recommends that background data be updated every 4 to 8 measurements (i.e., every two to four years if samples are collected semi-annually, or one to two years if samples are collected quarterly). The background data will be reviewed for trends or changes that may necessitate discontinuation of earlier portions of the background data set.

3.2 Data Evaluation and Data Distributions

DTE Electric will evaluate the groundwater data for each constituent included in the groundwater monitoring program using intra-well tolerance or prediction limits. The tolerance or prediction interval statistical procedure establishes an interval that bounds the ranges of expected concentrations representative of unaffected groundwater using the distribution of background data. The upper tolerance or prediction limit of that interval is then used for comparison to the concentration level of each constituent in each compliance well. Development of the tolerance or prediction limits used for comparison during detection monitoring will be conducted in accordance with the *Unified Guidance*. The following is a summary of descriptive statistics and tolerance or prediction limit choices.

3.2.1 Background Determination

Statistical limits will be calculated after the collection of a minimum of eight independent samples. The analytical results from the eight “background” samples will be used to determine the statistical limits for each individual parameter. For inter-well comparisons, background data should be “pooled” creating a single, combined background dataset from the background monitoring wells. For intra-well, the background data set is comprised of the historical data set established at each individual monitoring well.

The background dataset (and hence the prediction limits) will be updated as appropriate (as discussed above in Section 3.1) to maintain necessary statistical sensitivity. New data will be compared to the existing background data set to determine if there are outlier values, and whether the data are statistically similar. If there are no outliers and the data are statistically similar, the new data will be added to the existing background data set.

3.2.2 Outlier Evaluation

Outliers and anomalies are inconsistently large or small values that can occur as a result of sampling, analytical, or transcription errors; laboratory or field contamination; or shelf-life exceedance; or extreme, but accurately detected environmental conditions (e.g., spills). Data will be reviewed graphically using tools such as time concentration trend plots, box and whisker plots and/or probability plots to illustrate and identify outliers, trends, or otherwise unusual observations at each monitoring location. This will be accomplished prior to further in-depth review of the data sets to identify any obvious field or laboratory anomalies. Data points that are determined to be non-representative will be ‘flagged’ for further detailed evaluation prior to removing from the background data or designating as an outlier.

3.2.3 Testing for Normality

Statistical tests often assume that data are normally distributed or that data can be normalized by various standard methods. The assumption of normality can be tested in various ways. Formal normality testing such as utilizing the Shapiro-Wilk test (for $n < 50$) or the Shapiro-Francia Test (for $n > 50$) or calculation of a coefficient of skewness may be utilized in accordance with the *Unified Guidance*. Alternatively, graphing data on a probability plot can also be used to test for normality. If the data appear to be non-normal, mathematical transformations of the data may be utilized such that the transformed data follow a normal distribution (e.g., lognormal distributions). Alternatively, non-parametric tests may be utilized when data cannot be normalized.

The following are guidelines for decision making during normality testing:

1. If the original data show that the data are not normally distributed, then apply a natural log-transformation to the data and test for normality using the above methods.
2. If the original or the natural log-transformed data confirm that the data are normally distributed, then apply a normal distribution test.
3. If neither the original nor the natural log-transformed data fit a normal distribution, then apply a distribution-free test.

3.2.4 Evaluation of Non-Detects

Background concentrations that are reported as less than the practical quantitation limit (PQL) (herein referred to as non-detects) will be evaluated differently, depending upon the percentage of non-detects to the reported concentrations for a given parameter at a given monitoring well. The evaluation of non-detects was as follows:

Less Than 15% Non-detects

For data that was normally or lognormally distributed and less than 15% non-detects, one-half the value of the method detection limit will be used to calculate the prediction limit. If normally or lognormally cannot be met using one-half of the method detection limit, and if the method detection limits were equal, alternating zero with the value of the method detection limit will be considered in order to determine the normality of the data set.

15% to 50% Non-detects

If more than 15% but less than 50% of the overall data are less than the detection limit, either Aitchison's adjustment, or Cohen's adjustment, or the Kaplan Meijer adjustment will be used to determine the statistical limits in accordance with the *Unified Guidance*.

51% to 100% Non-detects

For data sets that contain greater than 50% non-detects, the non-parametric statistical limits will be utilized as described below.

3.3 Parametric Tolerance or Prediction Limits

Tolerance and prediction intervals are similar approaches to establish statistical ranges constructed from background or baseline data. However, tolerance limits define the range of data that fall within a specified percentage with a specified level of confidence (where a proportion of the population is expected to lie), whereas prediction limits involve predicting the

upper limit of possible future values based on a background or baseline data set and comparing that predicted limit to compliance well data.

Intra-well tolerance or prediction limits are calculated using baseline period or background data from each well. The tolerance or prediction limit will be calculated in accordance with the *Unified Guidance*. If the data set is log-normally distributed the tolerance or prediction limits will be calculated using the log-normally transformed data, and subsequently un-transformed to normal units.

In §257.93(g)(2) it states that for multiple comparisons, each testing period should have a Type I error rate no less than 0.05 while maintaining an individual well Type I error rate of no less than 0.01. Per §257.93(g)(4), these Type I limits do not apply directly to tolerance intervals or prediction intervals; however, the levels of confidence for the tolerance or prediction limit approach must be at least as effective as any other approach based on consideration of the number of samples, distribution, and range of concentration values in the background data set for each constituent.

3.4 Non-Parametric Tolerance or Prediction Limits

Parameters that consist of mainly non-detect data usually violate the assumptions needed for normal based tolerance or parametric prediction intervals. Therefore, as recommended in the *Unified Guidance*, the non-parametric tolerance or prediction limit method will be chosen.

A non-parametric upper tolerance or prediction limit is constructed by setting the limit as a large order statistic selected from background (e.g., the maximum background value). This method has lower statistical power than parametric methods; therefore, it is important to control outliers within the dataset to maintain adequate statistical power that this method can provide. Due to the lack of statistical power of this method, it will only be used when other methods are not available.

3.5 Double Quantification Rule

The double quantification rule is discussed in Section 6.2.2 of the *Unified Guidance*. In the cases where the background dataset for a given well is 100% non-detect, a confirmed exceedance is registered if any well-constituent pair exhibits quantified measurements (i.e., at or above the reporting limit) in two consecutive sample and resample events. This method will be used for non-detect data sets.

3.6 Verification Resampling

In order to achieve the site wide false positive rates (SWFPR) recommended in the *Unified Guidance*, a verification resampling program is necessary. Without verification resampling, the

SWFPR cannot be reasonably met, and much larger statistical limits would be required to achieve a SWFPR of 5% or less. Furthermore, the resulting false negative rate would be greatly increased. Under these circumstances, if there is an exceedance of a tolerance limit or prediction limit for one or more of the parameters, the well(s) of concern will be resampled within 30 days of the completion of the initial statistical analysis. Only constituents that initially exceed their statistical limit (i.e., have no previously recorded SSIs) will be analyzed for verification purposes. This verification sampling must be performed within the same compliance period as the event being verified. If the verification sample remains statistically significant, then statistical significance will be considered. If the verification sample is not statistically significant, then no SSI will be recorded for the monitoring event.

Section 4

Evaluation of Detection Monitoring Data

4.1 Statistical Evaluation during Detection Monitoring

According to §257.94(e), if the facility determines, pursuant to §257.93(h), that there is a SSI over background levels for one or more of the Appendix III constituents, the facility will, within 90 days of detecting a SSI, establish an assessment monitoring program <or> demonstrate that:

- A source other than the CCR unit caused the SSI, or
- The SSI resulted from error in sampling, analysis, statistical evaluation, or natural variation in groundwater quality.

The owner or operator must complete a written demonstration (i.e., Alternative Source Demonstration, ASD), of the above within 90 days of confirming the SSI. If a successful ASD is completed, a certification from a qualified professional engineer is required, and the CCR unit may continue with detection monitoring.

If a successful ASD is not completed within the 90-day period, the owner or operator of the CCR unit must initiate an assessment monitoring program as required under §257.95, described further in Section 5. The facility must also include the ASD in the annual groundwater monitoring and corrective action report required by §257.90(e), in addition to the certification by a qualified professional engineer.

Section 5

Assessment Monitoring

As discussed in Section 4, the facility must begin assessment monitoring for the CCR unit if a SSI is identified, and the SSI cannot be attributed to an ASD. Per the CCR Rule, assessment monitoring must begin within 90 days of identification of a SSI that is not attributed to an alternative source. During the 90-day period, wells included in the groundwater monitoring system will be sampled for Appendix IV constituents pursuant to §257.95(b). Within 90 days of obtaining the results from the first assessment monitoring event, all of the wells will be sampled for Appendix III and the detected Appendix IV parameters in the initial assessment monitoring event.

If assessment monitoring is triggered pursuant to §257.94(e)(1), data are compared to Groundwater Protection Standards (GPSs) or background groundwater quality. The CCR Rule [§257.95(h)] requires GPSs to be established for Appendix IV constituents that have been detected during baseline sampling. The GPS is set at the EPA maximum contaminant level (MCL) or a value based on background data. The MCLs will be the GPSs for those constituents that have MCLs unless the background concentration is greater than the MCL, which in that case, the statistically-determined background values becomes the GPS. For all other parameters that do not have MCLs, the GPS defaults to a statistically-based limit developed using background data. For GPSs that are established using background, tolerance limits are anticipated to be used to calculate the GPS. The background will be updated every two years, along with the resulting GPS, consistent with the *Unified Guidance*. If additional assessment monitoring parameters become detected during the assessment monitoring, GPSs will be developed for those parameters in the same manner as the initial parameters.

Consistent with the *Unified Guidance*, the preferred method for comparisons to a fixed standard will be confidence limits. An exceedance of the standard occurs when the 95 percent lower confidence level of the downgradient data exceeds the GPS. Confidence intervals will be established in a manner appropriate to the data set being evaluated (proportion of non-detect data, distribution, etc.). If the statistical tests conclude that an exceedance of the GPS or background has occurred, verification resampling may be conducted by the facility. Once the resampling data are available, the comparison to the GPS or background will be evaluated.

Section 6


Certification

Statistical Methods Certification per 40 CFR §257.93(f)
Belle River Power Plant Bottom Ash Basins
China Township, Michigan

The U.S. EPA's Disposal of Coal Combustion Residuals from Electric Utilities Final Rule Title 40 CFR Part 257 §257.93 requires that the owner or operator of an existing CCR unit develop the groundwater sampling and analysis program to include the selection of the statistical procedures to be used for evaluating groundwater monitoring data. The owner or operator must obtain a certification from a qualified professional engineer stating that the selected statistical method is appropriate for evaluating the groundwater monitoring data for the CCR management area. The certification must include a narrative description of the statistical method selected to evaluate the groundwater monitoring data to meet the requirements of Title 40 CFR §257.93.

CERTIFICATION

By means of this certification, I certify that I am a qualified professional engineer as defined by Title 40 CFR §257.53, that I have reviewed this Statistical Evaluation Plan, and that the statistical methods described herein are appropriate and meet the requirements of Title 40 CFR §257.93. This document is accurate and has been prepared in accordance with good engineering practices, including the consideration of applicable industry standards, and with the requirements of Title 40 CFR §257.93.

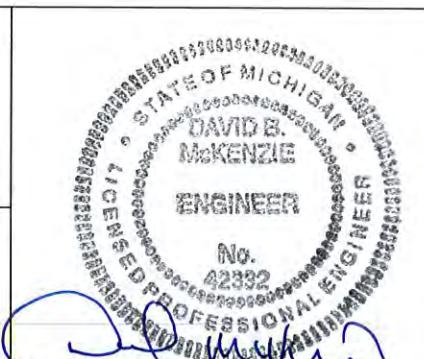Name: David B. McKenzie, P.E.	Date: October 31, 2017	 Stamp
Company: TRC Engineers Michigan, Inc.	Expiration Date: October 13, 2017	

Section 7

References

- ASTM. 2012. *Standard Guide for Developing Appropriate Statistical Approaches for Groundwater Detection Monitoring Programs*. D6312-98(2012)e1. West Conshohocken, PA: ASTM International.
- ITRC (Interstate Technology & Regulatory Council). 2013. Groundwater Statistics and Monitoring Compliance, Statistical Tools for the Project Life Cycle. GSMC-1. Washington, D.C.: Interstate Technology & Regulatory Council, Groundwater Statistics and Monitoring Compliance Team. <http://www.itrcweb.org/gsmc-1/>.
- TRC. 2017. Groundwater Monitoring System Summary Report, DTE Electric Company Belle River Power Plant Bottom Ash Basins and Diversion Basin Coal Combustion Residual Units, China Township, Michigan.
- United States Environmental Protection Agency (USEPA). 2010. *ProUCL Version 5.0.00 (5.0) Technical Guide*. EPA/600/R-07/041. Washington, DC: United States Environmental Protection Agency. <https://www.epa.gov/land-research/proucl-software>.
- USEPA. 2015. *ProUCL Version 5.1.00 (5.1) Technical Guide*. EPA/600/R-07/041. Washington, DC: United States Environmental Protection Agency. <https://www.epa.gov/land-research/proucl-software>.
- USEPA. 1989. *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, Interim Final Guidance*. Office of Solid Waste.
- USEPA. 2009. *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, Unified Guidance*. Office of Conservation and Recovery. EPA 530/R-09-007.

Figure

**LEGEND**

- SOIL BORING
- MONITORING WELL
- DECOMMISSIONED MONITORING WELL

NOTES

1. BASE MAP IMAGERY FROM ST. CLAIR COUNTY INFORMATION TECHNOLOGY DEPARTMENT WEBMAP, 2015.
2. WELL LOCATIONS SURVEYED IN MARCH, APRIL, JUNE 2016, AND JUNE 2017 BY BMJ ENGINEERS & SURVEYORS, INC.



0 200 400 Feet

1" = 200'

1:2,400

PROJECT: **DTE ELECTRIC COMPANY
BELLE RIVER POWER PLANT
4505 KING ROAD
CHINA TOWNSHIP, MICHIGAN**

TITLE:

MONITORING NETWORK AND SITE PLAN

DRAWN BY:	R SUEMNICKT	PROJ NO.:	265996.0003
CHECKED BY:	C SCIESZKA		
APPROVED BY:	V BUENING		
DATE:	OCTOBER 2017		

FIGURE 1

1540 Eisenhower Place
Ann Arbor, MI 48108-3284
Phone: 734.971.7080
www.trcsolutions.com

FILE NO.: 265996-0003-002_Stat.mxd